


## ZHV-0627L/S Solenoid Valve

ISO/TS16949 ISO9000 ISO14000  
RoHS REACH CE UL VDE TÜV



总重量 Total Weight: 29g  
应用范围: 医疗设备  
APPLICATION: MEDICAL MACHINA

类型: 二位三通/二位二通 TYPE: two position Three way  
TYPE: Two position two way

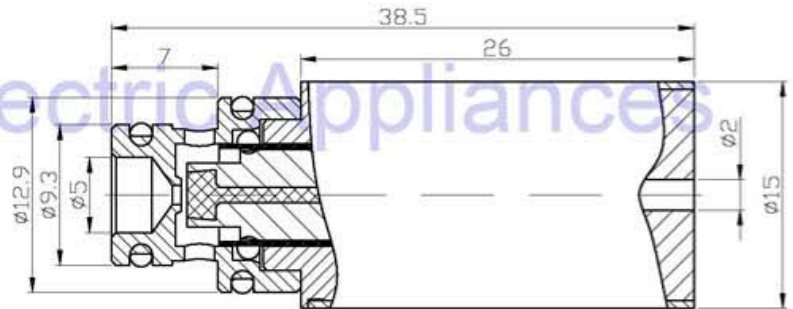

单位:mm Units:mm



### 综合特性 GENERAL FEATURES

1. 常用压力: 0~7500mmHg/0~10Bar  
Pressure: 0~7500mmHg/0~10Bar
2. 最小通径:  $\phi 1.3\text{mm}$   
Min Orifice:  $\phi 1.3\text{mm}$
3. 流体介质: 空气  
Fluid medium: Air
4. 寿命: 典型值为500万次 (on 1s, off 1s)  
Lify cycle: 5,000,000 cycles (on 1s, off 1s)
5. 绝缘等级: B类  
Insulation class: class B

### COIL DATA线圈资料

工作周期 (%) = $\frac{\text{工作时间}}{\text{工作时间} + \text{断开时间}} \times 100\%$ Duty cycle (%) = $\frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$	连续 Continuous 100%	间断 Or less 50%	间断 Or less 25%	间断 Or less 10%		
最大工作时间(秒) MAX. "on" time in seconds	$\infty$	55	19	3		
瓦特(W) (20℃) Watts at 20℃	2.4	4.8	9.6	24		
安匝数AT (20℃) Ampere-turns at 20℃	432	615	864	1368		
型号 Type no.	阻值 (20℃) Resistance ( $\Omega$ ) $\pm 10\%$	线圈匝数 No. Turns	电压 (VDC) Voltage DC			
ZHV-0627L-XX A XX	15	1080	6	8.5	12	19
No symbol L S	60	2160	12	17	24	38
三通 Three Way 常闭 NC 常开 NO	240	4320	24	34	48	76
电压 Voltage (V)	960	8640	48	68	96	152
系列号 Serial No.: A, B, C...						
电阻 Resistance ( $\Omega$ )						